


20 Amp CT/PT Meter Sockets, Aluminum, Ringless, Terminal Block and Test Switch Provision **

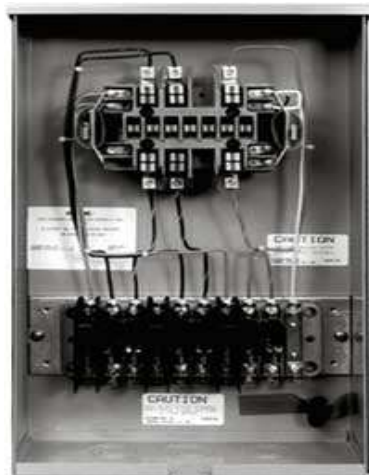


**** Must have integrated prewired switches per BPUB's specifications for all CT and PT connections:**
Voltages: Use RED/BLACK, BROWN, ORANGE.
Currents: Use RED, BLUE, YELLOW.
Neutral: Use BLACK.

**** Wire must be Copper, Gage 10, THHN, Stranded.**

**** For Single phase: 120 / 240 volts 3-wire use Wiring Form 4S.**
**** For Three phase: 120 / 208 volts Wye 4-wire use Wiring Form 9S.**
277 / 480 volts Wye 4-wire use Wiring Form 9S.
120 / 240 volts Delta 4-wire use Wiring Form 9S.
240 / 480 volts Delta 3-wire use Wiring Form 5S.


Form 4S



6 - Terminals

Milbank: UAPC7478-XL
Landis & Gyr: 9837-8200
Square D: USTS6-1C224-SQD


Form 5S

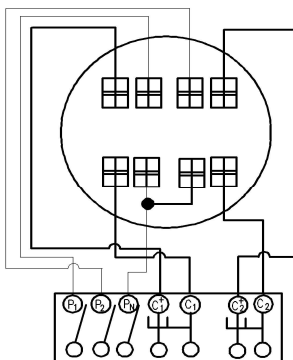

8 - Terminals

Milbank: UAPC7444-XL
Landis & Gyr: 9837-8400
Square D: USTS8-1C225-SQD

Form 9S

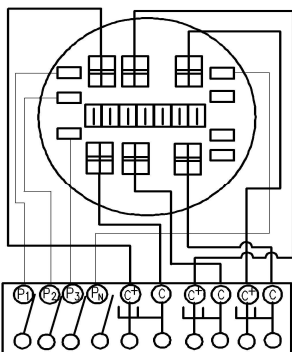

13 - Terminals

Milbank: UAPC7445-XL
Landis & Gyr: 9837-8500
Square D: USTS13-1C226-SQD

- Note: 1. - All Meter Sockets provided and installed by customer at site approved by BPUB.**
2. - All Meter Sockets are to be new stock and UL listed.
3. - Meter and Service installations must also meet City of Brownsville inspection requirements.



BROWNSVILLE
PUBLIC UTILITIES BOARD

CT/PT METER SOCKETS

DEVELOPED BY:

STANDARDS
COMMITTEE

APPROVED:

Jan 2023

DRAWING
NUMBER

ENG - 6B

